ropimex®



Screen-Systems

HealthCare - since 1976





disinfectable















ropimex® HyGentle®

for maximum hygiene

Product design:

Hygiene starts with the design. Corners, angles or geometries that are ill-suited for cleaning and disinfection are avoided to the greatest possible extent.

Material composition:

Cleanability and disinfectability are prioritized in the selection of the materials required for manufacturing the product. This is aimed at achieving an optimum where soiling and microbiological pollution are concerned. Porous, absorbent surfaces must be avoided.

Cleaning and disinfection:

We test and document the materials of our products in terms of their natural microbial contamination, just as we document their cleanability and disinfectability with commercially available detergents and disinfectants.

For your saftey:

ropimex® products conform to the highest safety standards. The telescopic screens including the trolley, the Vario rail system and the folding screens all bear the GS tested safety mark issued by the German TÜV (technical inspectorate).










Telescopic screens, Telescopic arms 4 - 13
Wall brackets / Brackets for equipment rails14 - 15
Mobile screens 16 - 17
Vario rail system 18 - 21
Curtains



Folding screens	26 -	39
Paravents	40 -	45
Folding Curtain PLiO	46 -	49
Shower splash guard	50 -	5

About us / For your safety /



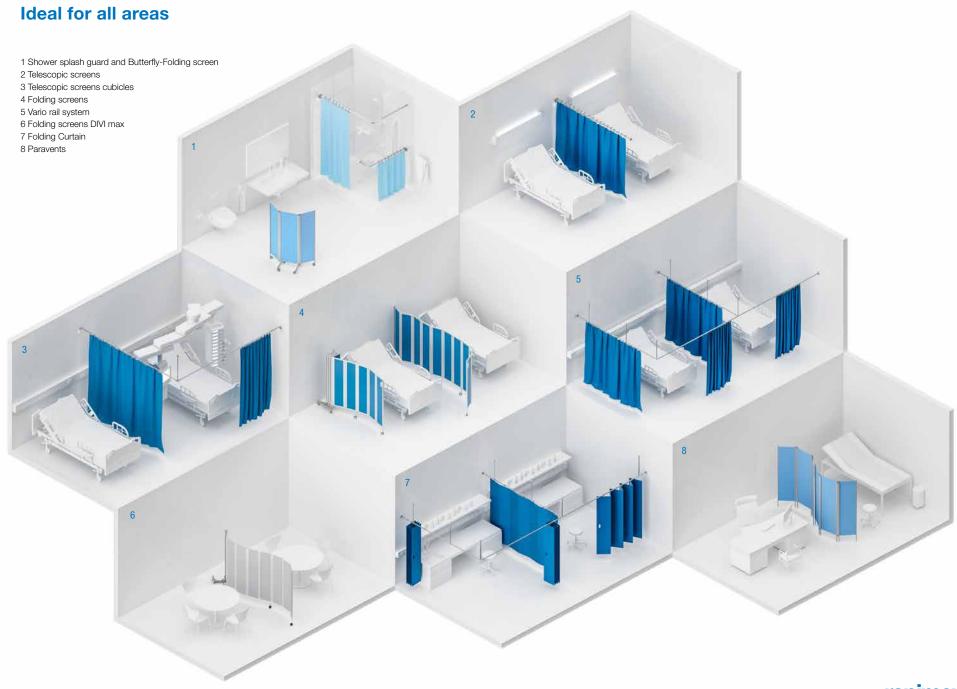

Telescopes of the new generation





ropimex® HyGentle®: Product design and material combination for maximum hygiene

The ropimex® telescopes of the new generation are optimized in handling, cleaning and disinfection by means of seamlessly integrated mechanics and particularly smooth, hygiene-friendly surfaces. ropimex® curtains, washable and disinfectable complete the hygiene concept.





Smooth telescopic tubes and Plastics for one hygiene-friendly surface.



Bending mechanism seamlessly integrated.



Integrated stop mechanism for the curtain rings



If the curtain rings are loaded they release themselves from the eyelets of the curtains and therefore avoid injuries and damage to the system.



Tail with
Locking fixed telescope at rest



Direct to the product video












RTS models in the doctor's surgery

RTS models in the retirement and care home One telescopic screen can be used to screen off several beds, which have been previously fitted with brackets

RTS: Telescopic screen, swing-out, self-supporting

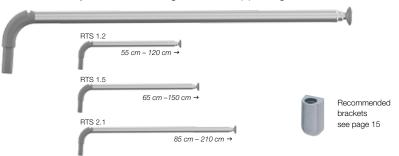

Material

ropimex® telescopic screens are made of anodised aluminium, high-quality, glass-fibre reinforced plastics. Easy to clean and to disinfect.





Model	Telescopic screen extension	Weight	Rings	Recommended curtains (see p. 22-23)
RTS 1.2	120 cm	0,5 kg	10	TCS 121, TCS 122, TCS 123, CQ 121, CQ 122
RTS 1.5	150 cm	0,6 kg	13	TCS 151, TCS 152, TCS 153, CQ 151, CQ 152
RTS 2.1	210 cm	0,7 kg	17	TCS 211, TCS 212, TCS 213, CQ 211, CQ 212

VR: Curtain rings



ropimex® curtain rings are always included with telescopic screens, telescopic arms and telescopic screen cubicles. Curtain rings can also be supplied separately. Standard colour: grey.



If they are loaded they release themselves from the eyelets of the curtains and therefore avoid injuries and damage to the system.








RTI models in the multi-bed room and on the intensive care unit.

One telescopic screen can be used to screen off several beds, which have been previously fitted with brackets

RTI: Telescopic screen, fold-down and swing-out, self-supporting

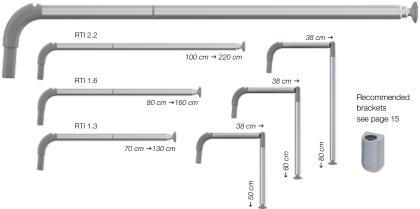

Material

ropimex® telescopic screens are made of anodised aluminium, high-quality, glass-fibre reinforced plastics. Easy to clean and to disinfect.



Model	Telescopic screen extension	Weight	Rings	Recommended curtains (see p. 22-23)
RTI 1.3	130 cm	0,6 kg	10	TCS 121, TCS 122, TCS 123, CQ 121, CQ 122
RTI 1.6	160 cm	0,7 kg	13	TCS 151, TCS 152, TCS 153, CQ 151, CQ 152
RTI 2.2	220 cm	0,8 kg	17	TCS 211, TCS 212, TCS 213, CQ 211, CQ 212

VR: Curtain rings



ropimex® curtain rings are always included with telescopic screens, telescopic arms and telescopic screen cubicles. Curtain rings can also be supplied separately. Standard colour: grey.



If they are loaded they release themselves from the eyelets of the curtains and therefore avoid injuries and damage to the system.








If the GL cannot be mounted, e.g. on the window, a ceiling mount is used

RTH: Telescopic arms, with hooks fold-down and swing-out

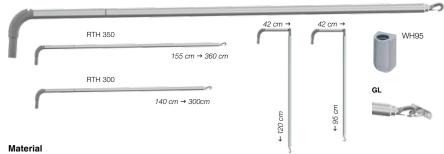

ropimex® telescopic screens are made of anodised aluminium, high-quality, glass-fibre reinforced plastics. Easy to clean and to disinfect.



odel	Telescopic screen extension	Weight	Rings	Curtains	Wall mount
TH 300	300 cm with hook at the distal end	1,0 kg	25	TCS 330	WH 95 with end support GL
TH 350	350 cm with hook at the distal end	1,1 kg	30	TCS 390	WH 95 with end support GL

RST 4

RST: adjustable ceiling mounts

Modell	Extension	Room height
RST 4	45 - 75 cm	245 - 275 cm
RST 8	75 - 135 cm	275 - 335 cm
RST 10*	110 - 200 cm	335 - 400 cm
*not illustrated		

← 45 cm - 75 cm

RST 8



The glass-fibre reinforced polyamide disc at the bottom end of the ceiling mount is used to hold the joints of the telescopic screen cubicles and the hooks of the telescopic arms, models RTH and RTA.



Ceiling mounts Brackets

GSH - Brackets for equipment rails





WH: Wall brackets for telescopic screens

WH 95 WH/LA

Model		Dimensions
WH 95	Wall mounting for all telescopic screens, die-cast aluminium, concealed screws, adjustable to compensate for unevenness of the wall, colour coated, colours: white (RAL 9010), signal grey (RAL 7004)	Height 10 cm Width 6 cm
WH	Wall mounting for all telescopic screens	Height 16,5 cm Width 6 cm
WH/LA	Wall mounting for bridging service ducts up to 15 cm	Height 16,5 cm Width 6 cm
WH/F	Wall mounting with knurled thumb screw	Height 16,5 cm Width 6 cm

GSH: Telescopic screen brackets for equipment rails



Model		Dimensions
GSH/F	Telescopic screen bracket for equipment rail 25/10 mm, fixing by means of clamping screw	Height 13,5 cm Width 4 cm
GSH/N	Telescopic screen bracket for equipment rails, wall-supported, height-adjustable	Höhe 55 cm Width 5 cm
GSH/DK	Telescopic screen bracket with "double clamp" for equipment rails, height-adjustable	Height 55 cm Width 5 cm
GSH/95	Telescopic screen bracket for equipment rails, adjustable tilt	Height 10 cm Width 6 cm
GSH/V	Telescopic screen bracket for vertical tubes, max. 38 mm tube diameter, adjustable tilt	Height 10 cm Width 13 cm

Mobile screens









The mobile screen '95 is ready to use in only a few seconds and is quickly returned to its parked position. Its smooth and easy movement, low weight and high degree of stability ensure simple handling.

The mobile screen, fitted with one or two telescopic screens, is ideal for mobile screening, e.g. for corridor occupancy, in multi-bed rooms, in the outpatients department or at the gynaecology chair.







RTI 1.3



Mobile screen '95 with one or two telescopic screens in use

FG95 trolley



Model		
FG95		Trolley , 155x60x40 cm (H/D/W), 4 castors ø 100 mm, 2 of which are lockable. Aluminium anodised, glass-fibre reinforced polyamide, corrosion-resistant, disinfectable.
LA		Electrically conductive castors available for an extra charge.
UKB		Universal clamp for holding a second telescopic screen. All telescopic screens in the "RTI" series can be used in the FG 95 trolley.
4	RTI 2.2	
		100 cm → 220 cm
I_	RTI 1.6	4
		80 cm →160 cm

70 cm →130 cm

We recommend the following fitout:





Model	With one telescopic screen	Extension	Curtains
RTI 2.2	Telescopic screen, fold-down	220 cm	TCS 212, CQ 212
Model	With two telescopic screens	Extension	Curtains
RTI 2.2	Fold-down telescopic screen, (can only be used in the trolley, not suitable for the UKB clamp)	220 cm	TCS 212, CQ 212
RTI 1.6	Telescopic screen, fold-down	160 cm	TCS 152, CQ 152
RTI 1.3	Telescopic screen, fold-down	130 cm	TCS 122, CQ 122
UKB	Universal clamp for use of a second telescopic screen, telesco	pic screens: RTI 1.3	3, RTI 1.6



Vario rail system






Easy ordering: A simple sketch suffices!

Simply prepare a hand-drawn, dimensioned sketch of the required room layout, enter the widths and lengths as well as the room height and the required headroom.

We will put together the complete system for you.

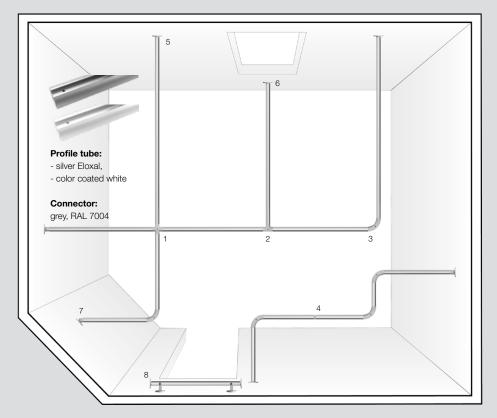



Curtain ring RVS/VR

Curtain ring made of unbreakable polyamide: Releases itself from the curtain eyelet if overloaded (approx. 2 kg).



Ringstopper: for fixation of a curtain ring at the beginning or the end of the rail.



Silicone cover profile

With the RVS connectors, you can create cabs as you wish



Cross-connector (RVS/KV)



T-connector (RVS/TV)



Corner solutions without sharp edges: with the curved connector RVS/BV (radius 60 mm)



Change later: simply disconnect the profile tube and install the connector of your choice, e.g. linear connector RVS/LV

RVS-Wall connections - for every requirement



Free-standing end: End cap RVS/EK stops the curtain.



Straight at the wall: Wall connector RVS/WA



Sloped walls, acute angles: the Vario wall connector RVS/WAV compensates for and levels out

asymmetries up to 180° and length differences up to +/- 5 mm.

Flexible to the ceiling - RVS ceiling connectors



Mounted directly under the ceiling: with ceiling bracket RVS/DH (distance from top of ceiling to bottom of rail approx. 6 cm).



Suspended at headroom height: with the adjustable ceiling mount (+/- 20 mm) RVS/DS.



For free-standing end RVS rails: adjustable double ceiling mount (+/- 2cm) RVS/DDS.



Easy above the lintel: e.g. at windows or doors using the wall connector RVS/WAS



Anchoring on profile rail:

possible along the whole length by means of square nut; for adjustable ceiling mount RVS/DS or with ceiling bracket RVS/DH. Max. spacing: 2 m.



Anchoring via all connectors:

Standard threaded hole for screwing in the adjustable ceiling mount RVS/DS or the ceiling bracket RVS/DH ensures firm support.

Curtains

Trevira®CS Bioactive

ropibel

Flame-resistant curtains can save lives!

ropimex® multifunctional textiles have more than proven themselves in practical application - whether here with us or in Tahiti or even Yakutsk.

We only use flame retardant qualities that will meet even the most stringent hygiene requirements. The longevity of our materials meanwhile guarantees a most cost-effective price-performance ratio.


Trevira®CS Bioactive



TCS: ropimex®-curtains made of Trevira®CS Bioactive have been tried and tested for 20 years

Permanently flame-retardant and anti-microbial

- 100% Polyester, permanently flame-retardant
- the fabric meets fire class B1 as per DIN 4102-1 and B-s1 d0
- with the fire resistance indelibly anchored in the molecular structure
- Trevira®CS Bioactive is permanently anti-microbial
- permeable to daylight, ideal if there are several partitions in a room
- light-fast, dimensionally stable, crease-resistant, long service life
- certified to Oeko-Tex standard 100
- fabric weight: ca. 115 g/m²



	vviatn	Х	Height in ch
TCS 110	110	х	175
TCS 121	140	Х	120
TCS 122	140	Х	140
TCS 123	140	Х	175
TCS 151	170	Х	120
TCS 152	170	Х	140
TCS 153	170	Х	175
TCS 200	200	Х	175
TCS 211	230	Х	120
TCS 212	230	Х	140
TCS 213	230	Х	175
TCS 215	250	Х	175
TCS 217	270	Х	175
TCS 300	300	Х	175
TCS 330	330	Х	175
TCS 360	360	Х	175
TCS 390	390	Х	175
TCS 420	420	Х	175
TCS 460	460	Х	175
TCS 500	500	Х	175

Special designs on request

ropibel®

ropimex®-ropibel - made of Polyester The feel-good fabric

Permanently flame-retardant, anti-microbial, Acoustic properties class C

- 100% Polyester, permanently flame-retardant
- the fabric meets fire class B1 as per DIN 4102-1, M 1 Non Feu (B+F+E), Classe (I), BS 5'867 (GB) and EN 13 773 Classe 1
- with the fire resistance indelibly anchored in the molecular structure
- permanently anti-microbial
- Acoustic properties class C
- permeable to daylight, ideal if there are several partitions in a room
- light-fast, dimensionally stable, crease-resistant, long service life
- certified to Oeko-Tex standard 100
- fabric weight: ca. 260 g/m²

	Width	Х	Height in c			
RB 1716	170	Х	160			
RB 1718	170	Х	180			
RB 1720	170	Х	200			
RB 2316	230	Х	160			
RB 2318	230	х	180			
RB 2320	230	Х	200			
RB 2716	270	Х	160			
RB 2718	270	х	180			
RB 2720	270	Х	200			
RB 3316	330	Х	160			
RB 3318	330	Х	180			
RB 3320	330	Х	200			
RB 4016	400	Х	160			
RB 4018	400	Х	180			
RB 4020	400	Х	200			
RB 5016	500	х	160			
RB 5018	500	Х	180			
RB 5020	500	Х	200			
Coopiel decigns on request						

Special designs on request

Available in 10 colours





light blue



white



light green





melon

azur



peach



champagne





beige

Available in 4 colours



grey



light green



light blue

^{*}Request our test report concerning disinfectant resistance based on DIN EN ISO 2812-4:2007.

Curtains

Zerøtex

Cleanique

staph CHEK

ropimex® Zerøtex - non-woven disposable curtain: saves time and money

For hygiene-sensitive environments

Standard curtains eyeleted. Suitable for ropimex RTS and RTI Telescope Systems or RVS Rail System

- Non-woven
- 100% polypropylene (PP)
- Ideal for hygiene-sensitive environments
- · In health facilities
- In public institutions with a high level of public access
- Complies with fire class B-s1 d0 tested according to DIN EN 13501
- Recyclable
- Skin friendly
- · Completely safe in accordance with physiological standards
- · Resistant to almost all solvents
- Dispose of recyclable material after use
- Available in 70 g/m²
- Fabric width: 210 cm

Size table

Width x Height in cm			
suitable fo	or		
Z1514	150	Х	140
Z1516 RTS 1.2	150	Х	160
Z1517	150	Х	175
Z1814	180	Х	140
Z1816 RTS 1.5	180	Х	160
Z1817	180	Х	175
Z2114	210	Х	140
Z2116 RTS 2.1	210	Х	160
72117	210	Y	175

6

Minimum purchase: 25 units per colour and size

Available in 5 colours











Cleanique

disinfectable

sky blue

CQ ropimex®- seamless Hygienic-curtain of the new generation

Top level hygiene:

- · antimicrobial activity
- beautiful draping properties
- · soft feel
- approved for skin contact in accordance with FDA (ISO 10993)
- flame-retardant, fire class M1
- thermoplastic polyether polyurethane
- · water-repellent
- · light-fast
- · resistant to rubbing
- · tear-proof
- recyclable
- seamless • durable
- · non-stick

orange

• fabric weight: ca. 270 g/m² 30°



Size table

	vviatn	Х	Height in ch
CQ108	100	Х	80
CQ128	120	Х	80
CQ121	140	Х	120
CQ122	140	Х	140
CQ123	140	Х	170
CQ151	170	Х	120
CQ152	170	Х	140
CQ153	170	Х	170
CQ211	220	Х	120
CQ212	220	Х	140
CQ213	220	Х	170
CQ1218	120	Х	180
CQ1220	120	Х	190
CQ1420	140	Х	190
CQ1620	160	Х	190
CQ1820	180	Х	190
CQ2020	200	Х	190
CQ2220	220	Х	190
CQ2420	240	Х	190
CQ2720	270	Х	190
CQ3020	300	Х	190
CQ3320	330	Х	190
0	!		

Special designs on request

VH/C 100 100 x

VH/C 120 120 x

VH/C 121 140 x

VH/C 151 170 x

Special designs on request

VH/C 122

VH/C 152

VH/C 211 VH/C 212 220 x

staph CHEK

Available in 3 colours

velvet-white

1. Permanently

embedded:

components

light blue

active antibacterial

Available in 5 colours

VH/C ropimex®- curtains made of staph CHEK

staph CHEK, the fabric for sanitary blocks, showers and bathrooms

- Stable and compact anti-bacterial
- flame-retardant, fire class M2
- ideal for use as a shower curtain
- skin-friendly / does not stick to the body
- anti-static
- impervious to liquids

yellow

- staining- and soiling-resistant
- in areas where careful treatment cannot be guaranteed because of exceptional circumstances
- simply wipe down with a sponge and household cleaner
- durable
- fabric weight: ca. 330 g/m²





140 x

170 x

220 x

Width x Height in cm



beige



white



^{*}Request our test report concerning disinfectant resistance based on DIN EN ISO 2812-4:2007.





Folding screens







Non-see-through 360° hinges.

The RTC unit (ropimex®-Turn&Connect) enables 360° leaf rotation.

Accessories available: Clamp set for service rail Spacer for wall-mounting











Note: Mounted on a trolley, the folding screen is only mobile. It is therefore not possible to convert it to a wall-mounted an equipment rail or column.









Possibility to fix until 4 folding walls

Folding screen	for wall-mounting RFW	Screen	open width
Leaf width	30 cm	3-leaf	90 cm
Heights	145 / 165 / 185 cm	4-leaf	120 cm
Weight	3,00 / 3,50 / 4,00 kg/leaf	5-leaf	150 cm
Frame	Frame and hinged profiles: extruded aluminium (Al Mg Si 05), anodised surface, connecting screws: V2A stainless steel	6-leaf	180 cm
Plastic parts	PA 6 GF 15, polyamide with 15% glass fibres	7-leaf	210 cm
	Polycarbonate, 2 mm, white, translucent, flame resistant,	8-leaf	240 cm
Infill panels	construction material class B1, DIN 4102-01, extremely impact resistant	9-leaf	270 cm
Care	commercially available cleaning product and disinfectant*	10-leaf	300 cm
	,		



Accessories		
Spacer set for wall fixing RFW-WA	Spacer for wall fixing, standard spacing 100 mm, special length to customer-specified dimensions possible up to 400 mm	
Clamp set RFW-KLS	Clamp set for fixing to double-track standard rail	



ith max. 10 leaves enables mobile use. Please note: use are available in heights 145 and 165 cm only.
• •
Height 145 cm, weight 14 kg
Height 165 cm, weight 15 kg
52 x 59 cm
For description and screen length see above (RFW)



Stainless steel column for folding screen		
Ideal wherever wall-mounting is not possible. Stainless steel column with dimensions 5 x 5 cm. Available in 3 heights.		
RFW-ES4 Height 145 cm, weight 5,00 kg		
RFW-ES6	Height 165 cm, weight 5,50 kg	
RFW-ES8	Height 185 cm, weight 6,20 kg	
Upright	5 x 5 cm	
Folding screen	For description and screen length see above (RFW)	

^{*}Request our test reports concerning the disinfection based on DIN EN ISO 2812-4:2007.



Folding screens



Colours and designs

Available in 10 colours and 4 design options



Plain



Retro design



- Can be combined leaf-wise with PLAIN
- Film overlay on one side
- The white-translucent polycarbonate enables the design to show through at the back

copper

- Specify whether right or left-hung





blue







green



- Can be combined leaf-wise with PLAIN

- Film overlay on one side

show through at the back

- Specify whether right or left-hung

Design Flowers



- The white-translucent polycarbonate enables the design to





yellow

red

Ginkgo design



- Film overlay on one side
- The white-translucent polycarbonate enables the design to show through at the back

orange

- Specify whether right or left-hung
- Can be combined leaf-wise with PLAIN









cherry red

Jp.

Monster design



- Can be combined leaf-wise with PLAIN
- Film overlay on one side
- The white-translucent polycarbonate enables the design to show through at the back
- Specify whether right or left-hung




Butterfly Folding wall







Ideal for mobile shielding in addition to the RFW

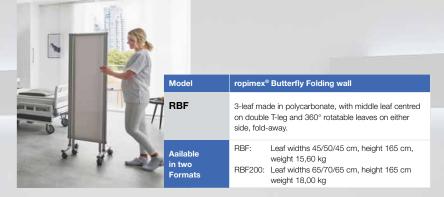

Frame and hinged profiles: extruded aluminium (Al Mg Si 05), anodised surface, connecting screws: Material V2A stainless steel, Infill panels Polycarbonate, 2 mm, Plastic parts PA 6 GF 15, polyamide with 15% glass fibres Colour white, translucent



Sticker bows







Ginkgo






Folding wall

Wall mounted



Technical data





Non-see-through 360° hinges. The RTC unit (ropimex®-Turn&Connect) enables 360° leaf rotation.


Accessories available: Clamp set for service rail Spacer for wall-mounting








Note: Mounted on







Possibility to fix until 4 folding walls











Width / panel 30 cm 3-panels 90 cm Heights 150 / 180 cm 4-panels 120 cm Weights 3,73 / 4,06 kg/panel 5-panels 150 cm Frame and hinge components: extruded aluminium (Al Mg 6-panels 180 cm Frame Si 05), anodized surface, fastening: V2A Stainless steel 7-panels 210 cm Plastic parts PA 6 GF 15, polyamide with 15% glass fibres 8-panels 240 cm Panel high-quality HPL (High-Pressure-Laminate) by Resopal 9-panels 270 cm 10-panels 300 cm Care-Instructions clean with disinfectants in current general use*



Model DX - DIVI max - wall mounted

263301163	
ces for wall unting Set WA	braces for wall multiple braces for wall wall multiple braces for wall wall wall wall wall wall wall wal

nounting (set of 2 pcs). , specific sizes available upon request

Clamps-Set DX-KLS

DX-

clamps for track mounting (set of 2 pcs)



Trolley for folding wall DIVI max

To ensure the best possible stability, the mobile version is available with up a maximum of 10 panels only and the height is 163 cm.

Height 163cm, weight of the feet: 17,00 kg

Size of base: 52 x 59 cm

Folding wall: description and width: see above

DX-ES Stainless steel column for folding DIVI max

Perfect for anywhere where there are no attachment points. This column has 4 sides each 5 cm, available in 2 heights

DX-ES5: height 150cm, weight: 5,20 kg

DX-E85: height 180 cm, weight: 6,02 kg

5 x 5 cm

Folding wall: description and width: see above

*Request our test reports concerning the disinfection based on DIN EN ISO 2812-4:2007.

Lightweight paravents





(€



ropimex®-Lightweight paravents are convincingly easy to handle. The 360° non-see-through hinges each leaf enable each leaf to be moved into the required position. Standard fabric covering with staph CHEK fabric, with Trevira®CS for an additional charge.

Please note: Paravent leaves must always be positioned at an angle to each other, unless the ropimex® base (model RLP/C) is used.








Folded together, a storage space can be found anywhere



Base for stabilising a single or several paravents to make use of the open width or to form a routing system



Covering: without folds. Opaque 360° hinges.



Leaf-wise colour selection also possible.



Standard version without castors. Can be supplied with castors for an additional charge.



staphCHEK



Model	ropimex®-lightweight paravent	Leaf	Weight	Width	Height
RLP/2	Lightweight paravent, 2-leaf	2	3,8 kg	100 cm	165 cm
RLP/3	Lightweight paravent, 3-leaf	3	5,7 kg	150 cm	165 cm
RLP/4	Lightweight paravent, 4-leaf	4	7,6 kg	200 cm	165 cm
RLP/5	Lightweight paravent, 5-leaf	5	9,5 kg	250 cm	165 cm

Material	Frame: Aluminium design profiles, natural-anodised, foot and cover caps made of polyamide, light grey. Optional: Plastic castors, black
Covering	Standard covering staph CHEK. staph CHEK fabric is antibacterial, flame-resistant, self-extinguishing, antistatic and durable. It does not have to be washed. Stains are easily wiped off with a sponge and household cleaning products.
Colours	light blue, white, yellow, beige, mint

Lightweight paravents



RLP/C base to stabilise the paravent



Base for holding up to 4 paravents



1 paravent at right-angles



3 paravents in the base



4 paravents in the base



2-leaf paravent in the base

Paravents in a row as a routing system

Model	ropimex®- base		
RLP/C	Base to stabilise the paravent when opened out straight (use of the open width) nd/or for holding several paravents (max. 4 per base), as a partition or for setting up a routing system		
Material	Glass-fibre reinforced polyamide (GRP)		
Dimensions/ Weight	8 x 15 x 30 cm (H x W x D), weight 1.3 kg		
Variations	1 Paravent up to 4 paravents possible in a line up to 4 paravents possible at right-angles		

Lightweight paravents



Wall mounted

RLP/W for wall-mounting



Model	ropimex®- Llightweight paravent with wall connector	Leaf	Weight	Width	Height
RLP/W2	with wall connector, on castors	2	3,8 kg	100 cm	165 cm
RLP/W3		3	5,7 kg	150 cm	165 cm
RLP/W4		4	7,6 kg	200 cm	165 cm
RLP/W5		5	9,5 kg	250 cm	165 cm

Accessories

RLP-WA	Spacer for wall fixing, standard spacing 100 mm, special length to customer-specified dimensions possible up to 400 mm
RLP-KLS	Clamp set for fixing to double-track standard rail
RLP-ES	Upright made of stainless steel for RLP/W, for free-standing installation in the room, height 1,650 mm

Butterfly Paravent RBP





 ϵ



Butterfly paravent, mobile, ideal for screening the bottom ends of beds




Material	Frame: Aluminium design profiles, natural-anodised, foot and cover caps made of polyamide, light grey. Plastic castors, black
Covering	Standard covering staph CHEK. staph CHEK fabric is antibacterial, flame-resistant, self-extinguishing, antistatic and durable. It does not have to be washed. Stains are easily wiped off with a sponge and household cleaning products.
Colours	light blue, white, yellow, beige, mint

Covering (see page 23)





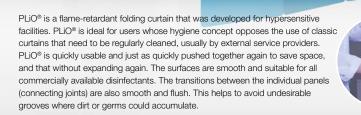



PLiO in hospital




Ideal room divider



PLiO® is quickly usable and just as quickly pushed together again to save space.



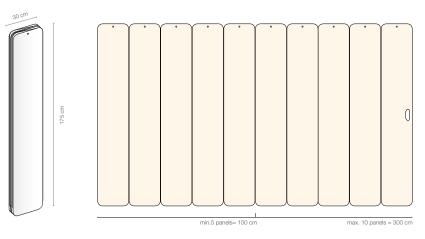

Curtain rings

Semi-open PLiO® curtain ring for curtain systems that are permanently installed and hence not freely accessible, e.g. ropimex® RVS



Ringstopper for fixation of a curtain ring at the beginning or the end of the rail.

In combination with the RVS Rail system generally white powder coated (see page 19-21)



Model	Coverage		
PLiO/5	5-panelled	150 cm	
PLiO/6	6-panelled	180 cm	
PLiO/7	7-panelled	210 cm	
PLiO/8	8-panelled	240 cm	
PLiO/9	9-panelled	270 cm	
PLiO/10	10-panelled	300 cm	

Material	Panels made from hard PVC, joints from soft PVC, phthalate-free Fire protection class: as per DIN EN 13501 B – s2 d0
Dimensions	Panel width: 30 cm, Height: 175 cm, Panel weight: 310 g/panel
Care	commercially available cleaning product and disinfectant*
Colours	RAL 9010 Pure white, RAL 5014 Dove blue, RAL 6034 Pastel turquoise, *


^{*}Colours based on RAL, colour variations are possible.

Shower splash guard **Telescopic screen cubicles**







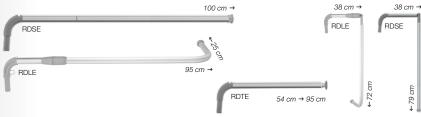

Model		Projection	Recommended curtains	Rings
RDSE	Splash guard arm swing-out and fold-down	100 cm	VH/C 100 CQ 108	8
RDTE	Splash guard arm, telescopic swing-out	95 cm	VH/C 100 CQ 108	8
RDLE	Splash guard arm, L-shaped, can be used on the right and left-hand side, side leg 25 cm, swing-out and fold-down	95 cm	VH/C 120 CQ 128	10
Wall mount	Recommended wall mount: WH, WH 95 (for a description see p.13) ropimex®-curtain rings are always included with our telescopic screens, telescopic arms and telescopic screen cubicles. Colour: grey.			
VR				

ropimex°-Telescopic screen cubicles Model RKLE

(wall fixing)

With this space-saving model it takes just a few seconds to create a screen for washing, changing, radiotherapy or inhaling, either as a corner solution or as a U-shaped solution.





Recommended curtains (see p. 22-23)					
staphCHEK				Cleanique®	

Satisfied customers all over the world



Since 1976, ropimex® has been busy finding solutions to protect the privacy of the sick and those in need of care.

The telescopic screens of the early years are still in use today. From them a system developed, whose diversity, use and combination options provide a suitable solution for each and every customer.

All these properties, top advice from authorised stockists and the fastest possible delivery have secured ropimex® more than 80,000 satisfied users to date, all over the world.



For your safety





ropimex® products conform to the highest safety standards.

The telescopic screens including the trolley, the Vario rail system and the folding screens all bear the GS tested safety mark issued by the German TÜV (technical inspectorate).

ropimex® curtains made of Trevira®CS pass every fire test worldwide and are tested and certified to the Öko-Tex standard 100 Europe-wide.

ropimex® Privacy Systems - 43 years of experience in designing medical inventory for hospitals, therapy centers and care facilities. Our products meet the regulatory requirements for medical devices.

The systems are designed so that a patient zone / intimate zone can be created for virtually any existing condition - stationary or mobile.

ropimex® privacy systems are the customizable accessories for medical devices such as patient beds, treatment couches and treatment chairs in medical facilities.

ropimex® privacy systems are compliant with the Swiss Privacy Policy, which requires confidential handling of patient-related data. These patient-related data also include explicit discussions between patients and patients and the preservation of privacy in treatment and patient care.



Fabric sample cards



Do you need a fabric sample card? Just phone 0 68 21/9 12 77-0 - we will send you what you need without delay!



ropimex®

Telescopic screens I Telescopic arms I Mobile screens I Vario rail system I Curtains Folding screens I Paravents I Folding Curtain PLiO I Shower splash guard



